

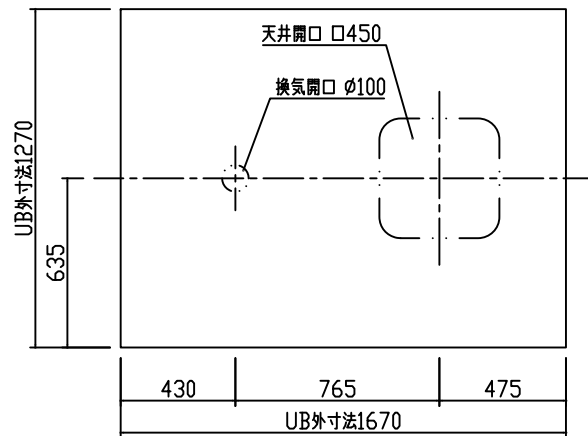


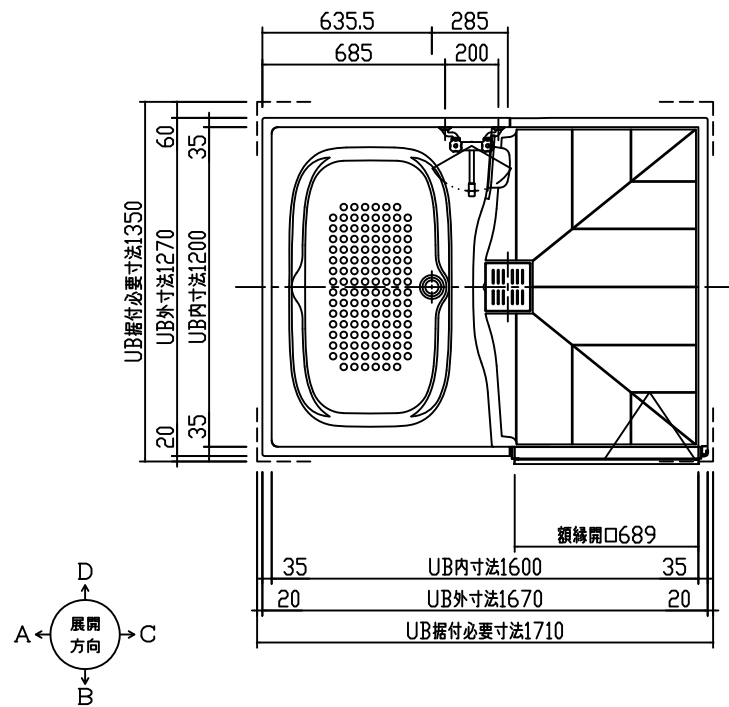


名 称	材 質	数量	摘 要
下部本体	FRP	1	1270×1670×717H
壁パネル	FRP	1set	H=1500 H=2000
天井パネル	FRP	1	
天井点検蓋	ABS	1	450×450
下部点検蓋	ABS	1	240×350 棚付
ドア（枠）	アルミアルマイト処理	1	713×2000 折戸 ホワイト
混合水栓	クロムメッキ	1	2ハンドル シャワー付
照明	樹脂グローブ	1	防湿・半球型 LED
雑排水管	硬質塩化ビニール	1	VU50
浴槽排水管	硬質塩化ビニール	1	VP25
排水トラップ	ABS	1	
トラップ化粧蓋	PP-GF	1	165×178
脚ボルト	電気亜鉛メッキクロメート処理	6	M16 L=130


D 面

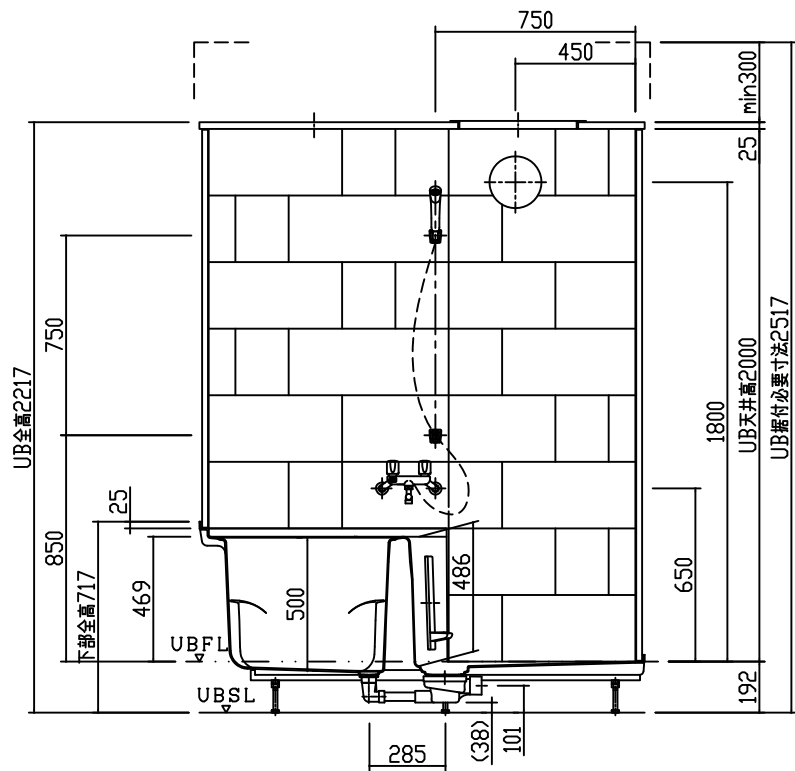


C 面

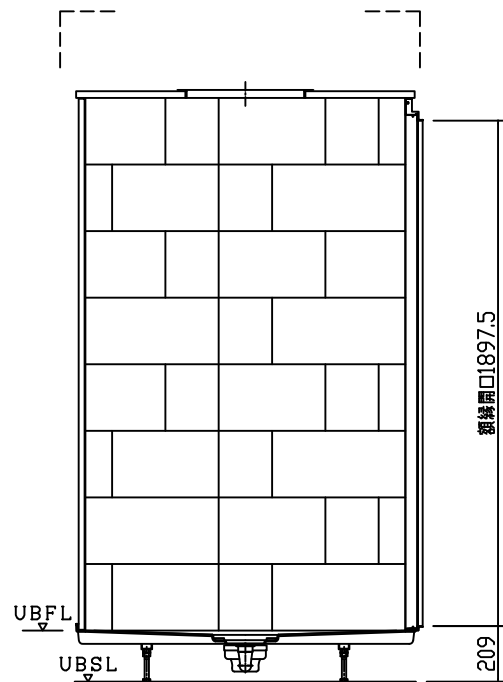


B 面

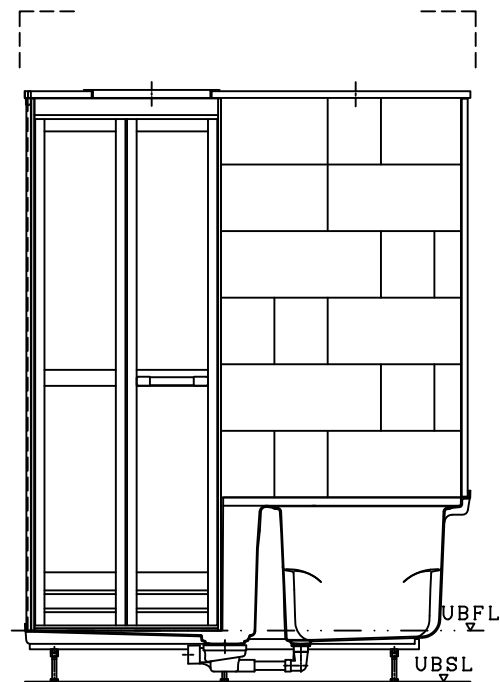







A 面

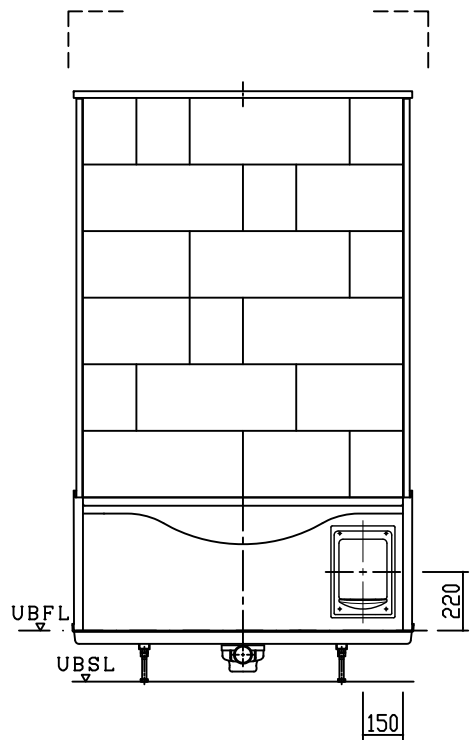


注、UBSLハUB設置面ヲ示シマス。

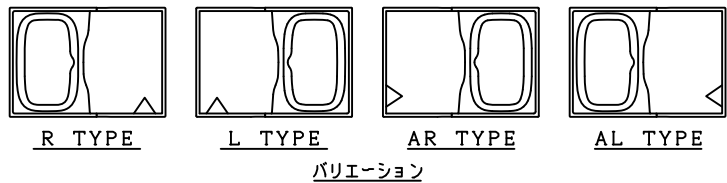

	記 事	改 訂					製 図	検 図	承 認		件 名	名 称	EP-1216SW2-R	尺 度	作成年月日
							中 村	野 崎	渡 会				製品図	A2	
													Y1200207 ⑪	1/20	2022年 12月31日


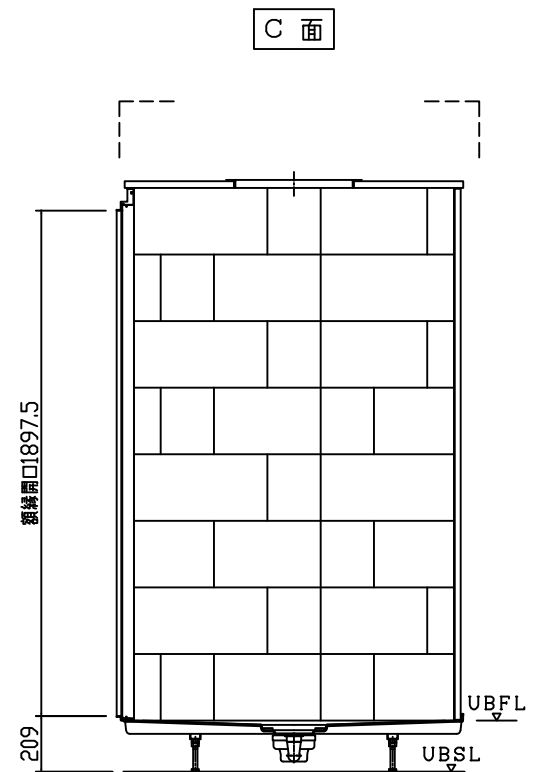
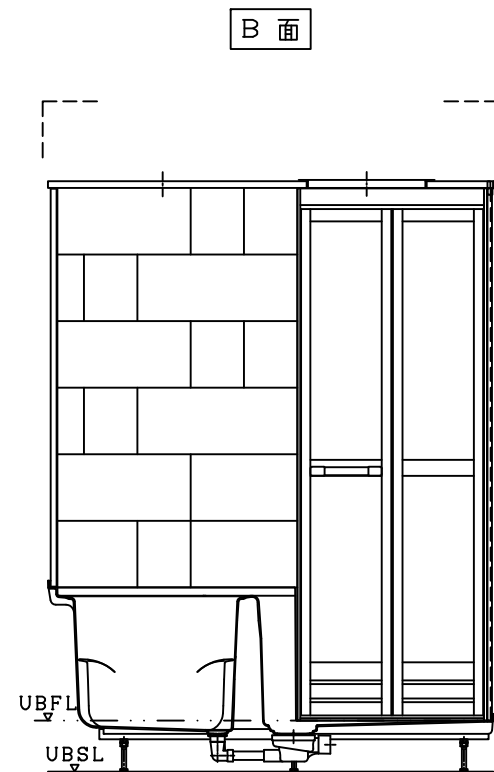
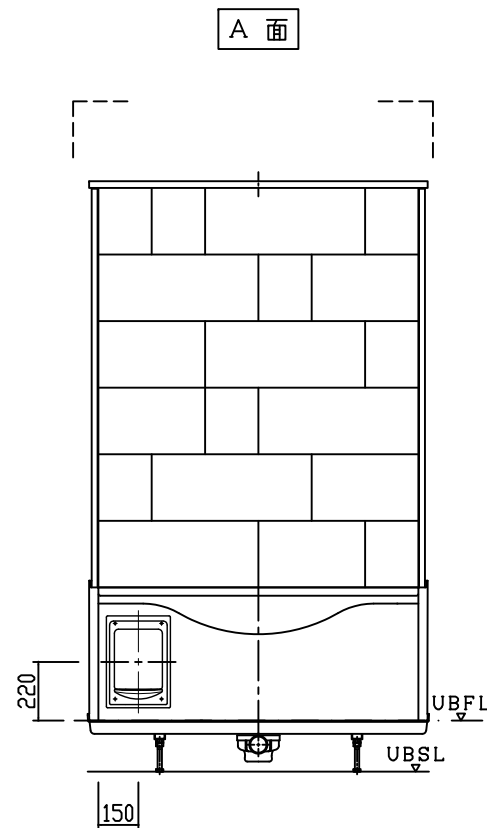
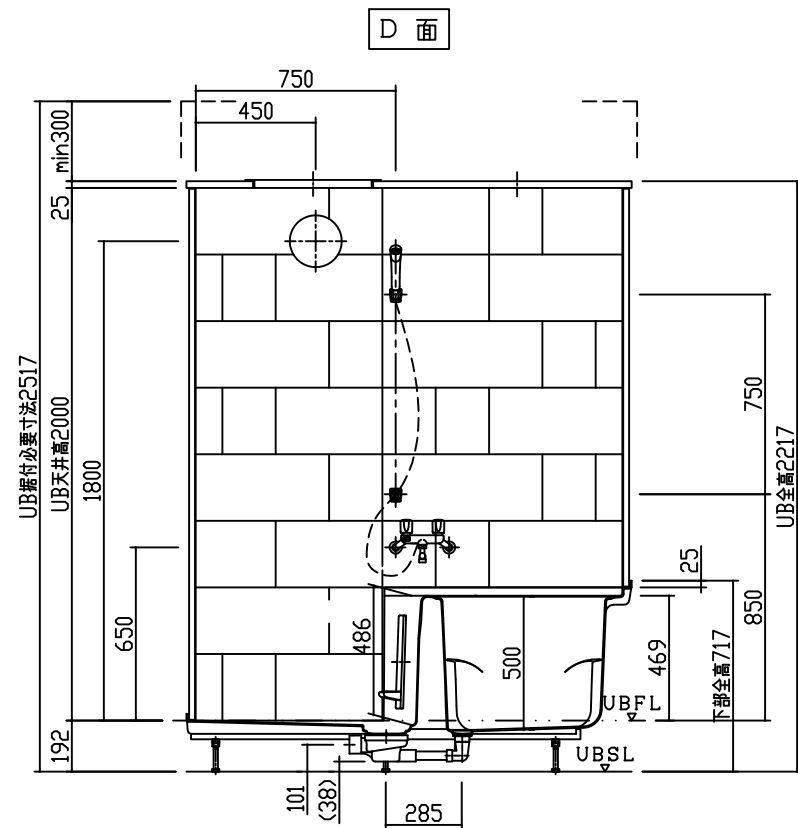
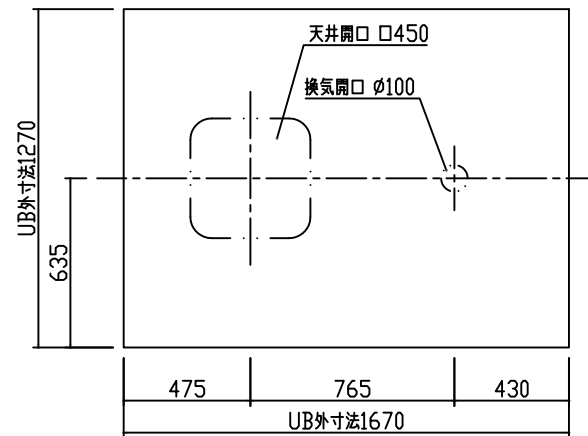
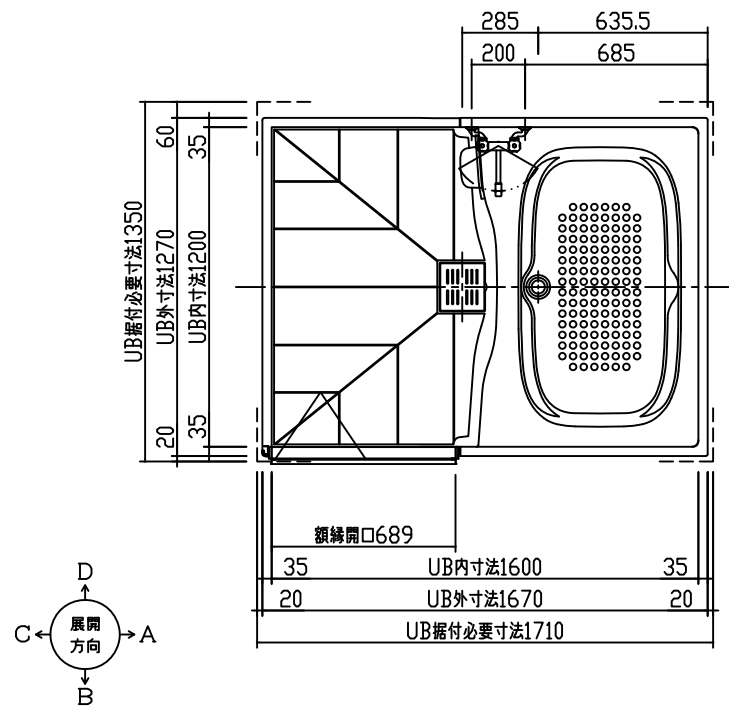


注、UBSLハUB設置面ヲ示シマス。

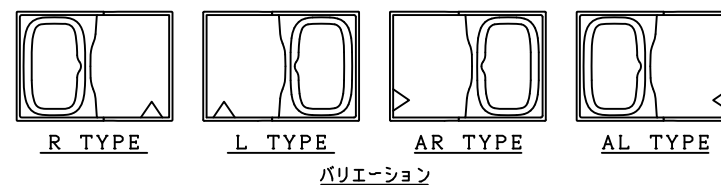



名 称	材 質	数 量	摘 要
下部本体	FRP	1	1270×1670×717H
壁パネル	FRP	1set	H=1500 H=2000
天井パネル	FRP	1	
天井点検蓋	ABS	1	450×450
下部点検蓋	ABS	1	240×350 棚付
ドア（枠）	アルミアルマイト処理	1	713×2000 折戸 ホワイト
混合水栓	クロムメッキ	1	2ハンドル シャワー付
照明	樹脂グローブ	1	防湿・半球型 LED
雑排水管	硬質塩化ビニール	1	VU50
浴槽排水管	硬質塩化ビニール	1	VP25
排水トラップ	ABS	1	
トラップ化粧蓋	PP-GF	1	165×178
脚ボルト	電気亜鉛メッキクロメート処理	6	M16 L=130

	記 事	改 訂					製 図	検 図	承 認		件 名	名 称	EP-1216SW2-L	尺 度	作成年月日
							中 村	野 崎	渡 会				製品図		
													Y1200208 ⑪	A2 1/20	2022年 12月31日

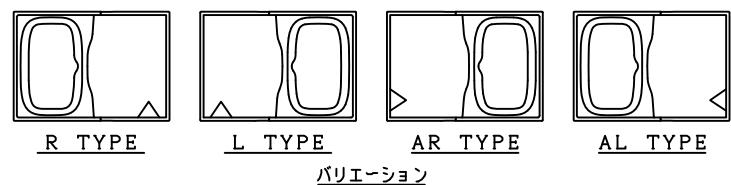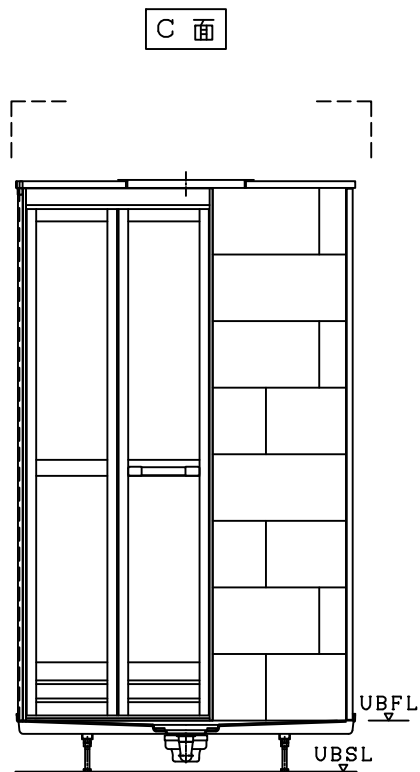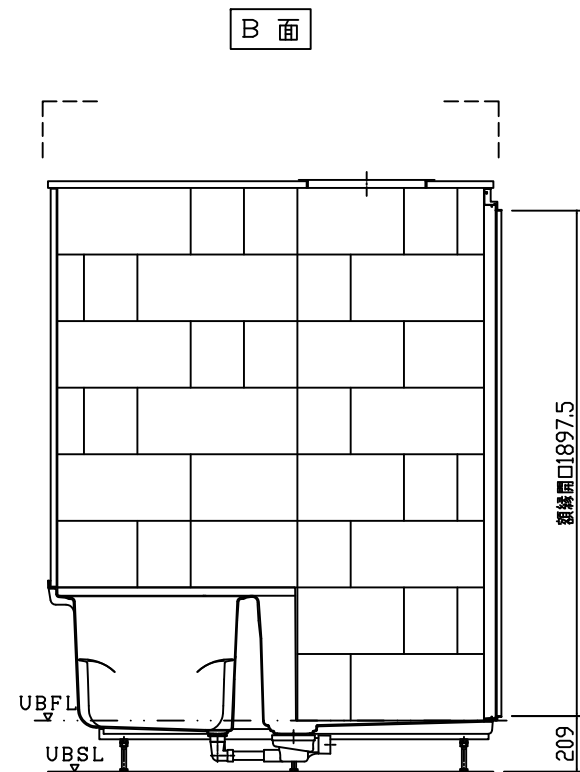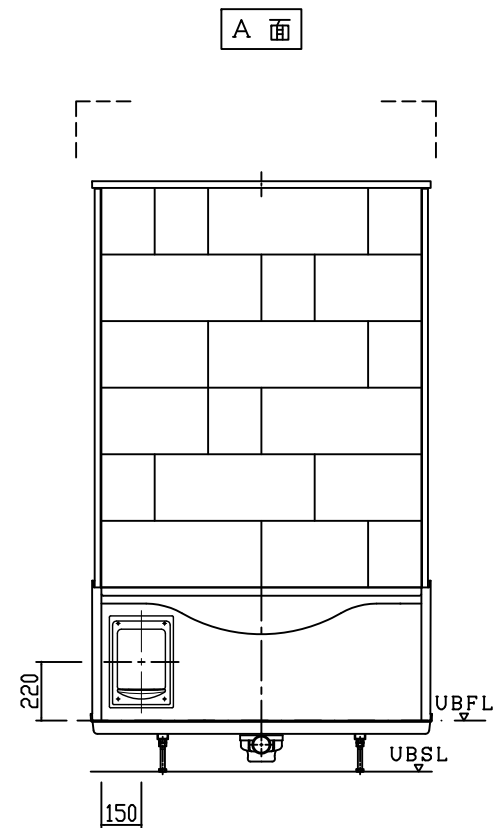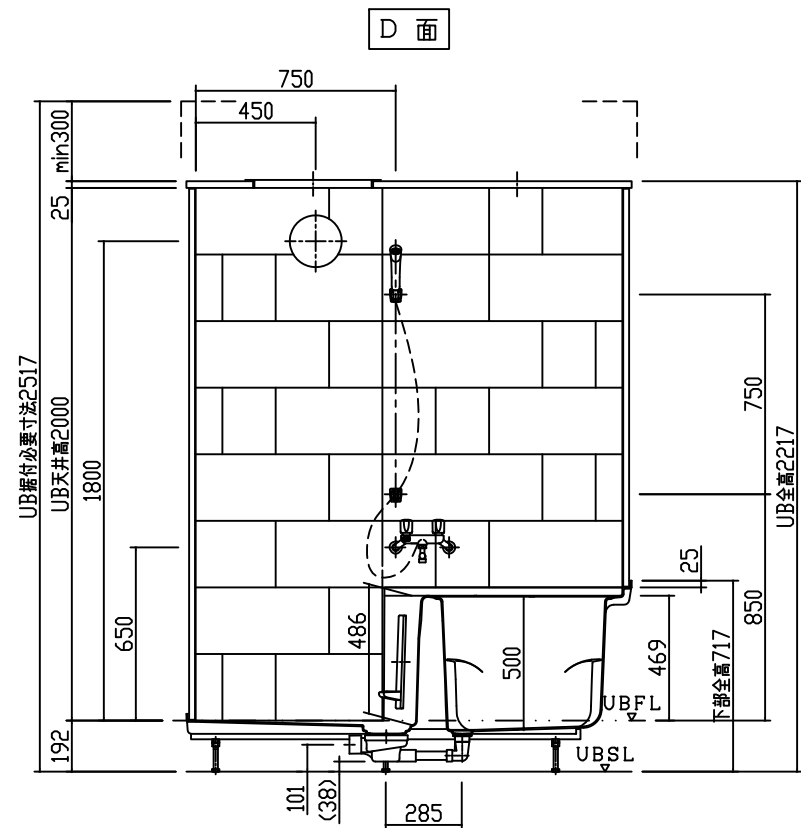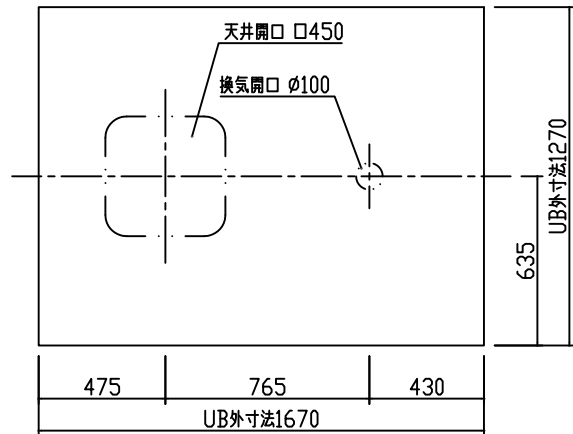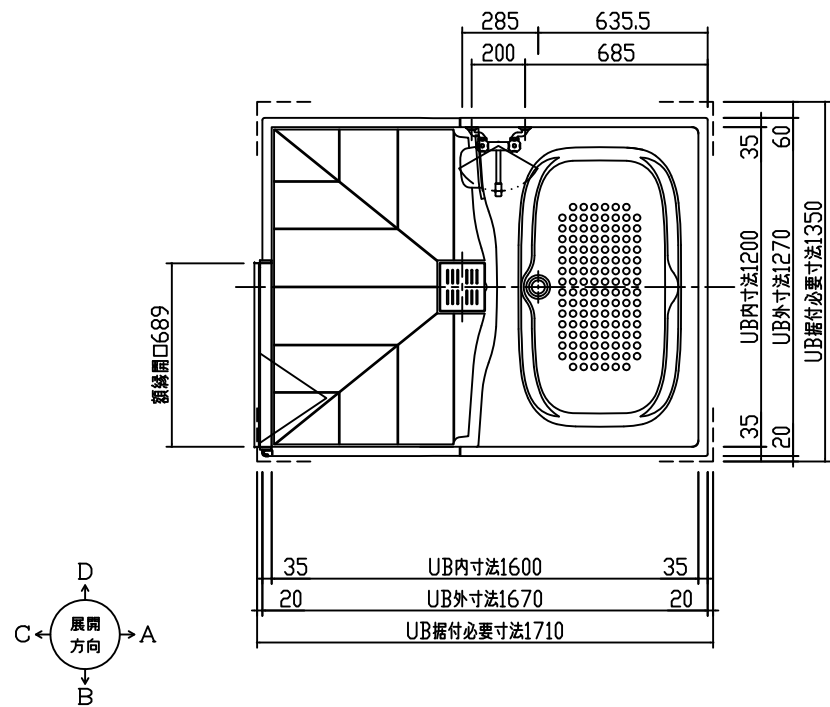

注、UBSLハUB設置面ヲ示シマス。

名 称	材 質	数 量	摘 要
下部本体	FRP	1	1270×1670×717H
壁パネル	FRP	1set	H=1500 H=2000
天井パネル	FRP	1	
天井点検蓋	ABS	1	450×450
下部点検蓋	ABS	1	240×350 棚付
ドア（枠）	アルミアルマイト処理	1	713×2000 折戸 ホワイト
混合水栓	クロムメッキ	1	2ハンドル シャワー付
照明	樹脂グローブ	1	防湿・半球型 LED
雑排水管	硬質塩化ビニール	1	VU50
浴槽排水管	硬質塩化ビニール	1	VP25
排水トラップ	ABS	1	
トラップ化粧蓋	PP-GF	1	165×178
脚ボルト	電気亜鉛メッキクロメート処理	6	M16 L=130

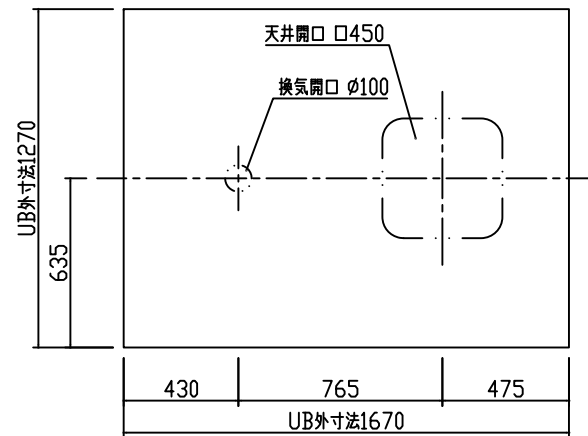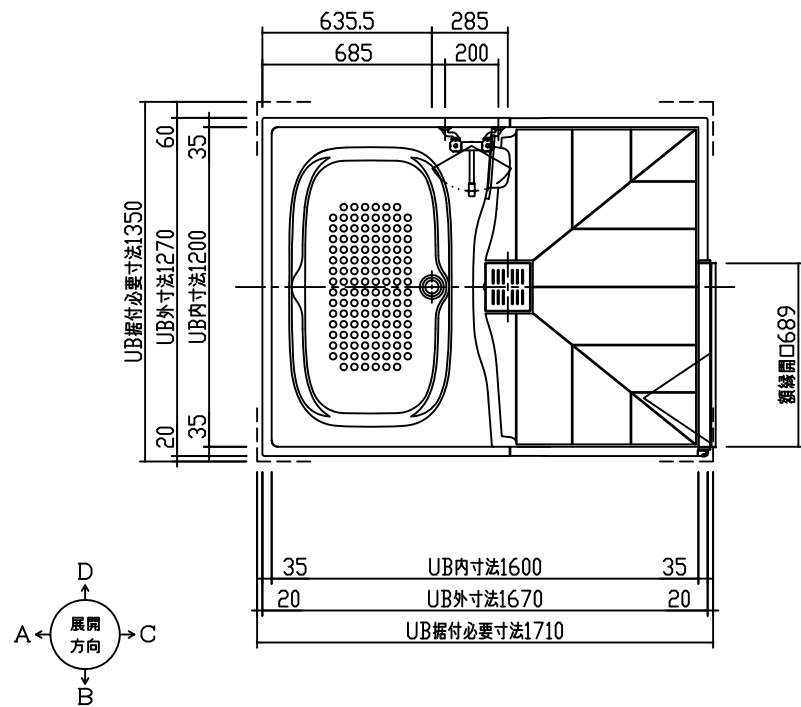





名 称	材 質	数 量	摘 要
下部本体	FRP	1	1270×1670×717H
壁パネル	FRP	1 set	H=1500 H=2000
天井パネル	FRP	1	
天井点検蓋	ABS	1	450×450
下部点検蓋	ABS	1	240×350 棚付
ドア（枠）	アルミアルマイト処理	1	713×2000 折戸 ホワイト
混合水栓	クロムメッキ	1	2ハンドル シャワー付
照明	樹脂グローブ	1	防湿・半球型 LED
雑排水管	硬質塩化ビニール	1	VU50
浴槽排水管	硬質塩化ビニール	1	VP25
排水トラップ	ABS	1	
トラップ化粧蓋	PP-GF	1	165×178
脚ボルト	電気亜鉛メッキクロメート処理	6	M16 L=130

D 面


C 面

B 面

A 面

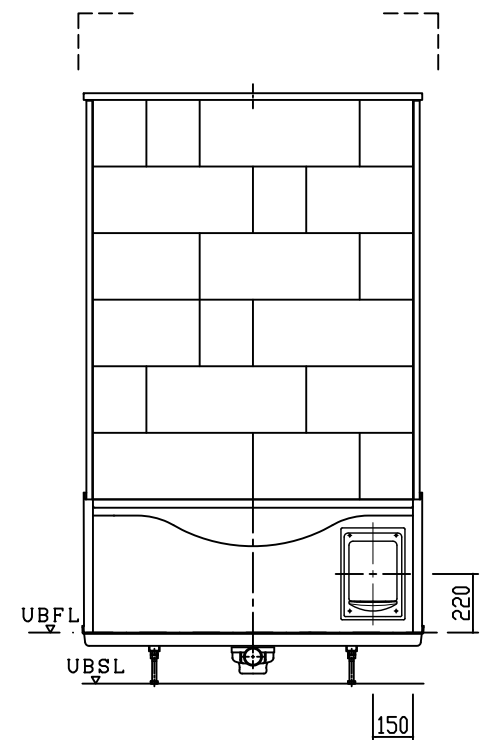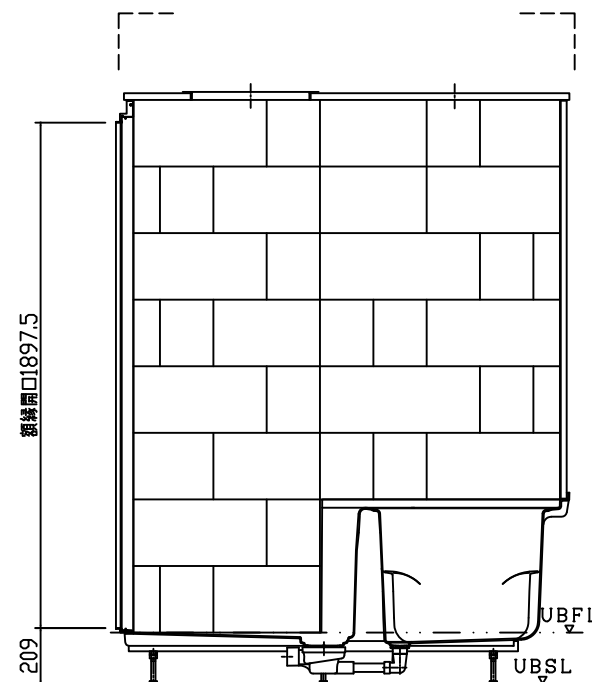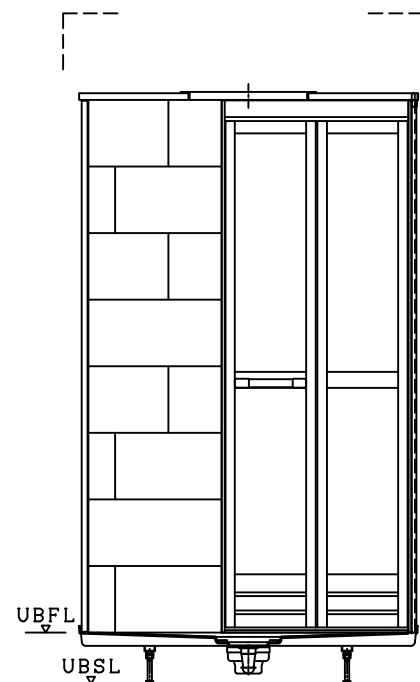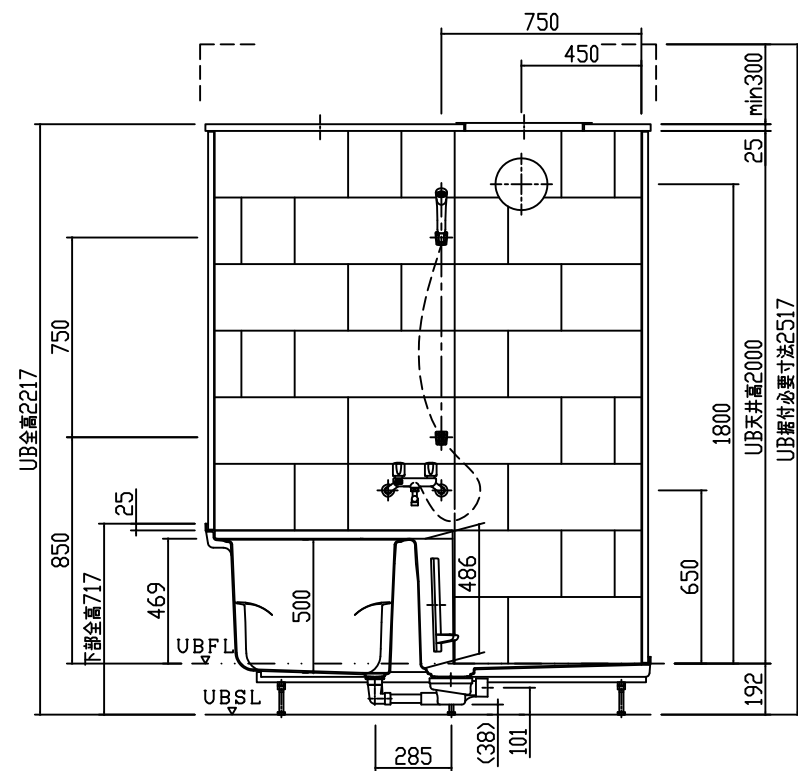

注、UBSLハUB設置面ヲ示シマス。

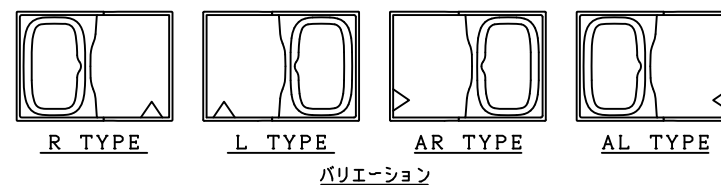

BReCS

記事

改訂

製図 検図 承認
中村 野崎 渡会

件名

名称
図番

EP-1216SW2-AL
製品図
Y1200210 ⑪

尺度
A2
1/20
作成年月日
2022年
12月31日

UB 外寸法 1670

UB 外寸法 1270

285 670 670 110

265 740 265

Technical drawing of the rear view of a 100mm diameter, 150mm high water meter. The drawing shows the internal components, including the meter body, gears, and the rear cover. Dimensions are provided: overall width 165.5mm, overall height 195mm, and a central mounting hole diameter of 139mm. A label "UB内壁" points to the internal wall of the rear cover, and a label "VVFφ1.6×2C 1.5m" points to the water supply pipe.

Technical drawing of a sliding door system, showing side, top, and front views with dimensions and labels.

Side View (Left): Shows the door profile with dimensions: 65, 15, 50, 83.5, 3, 209, 30, 35, 192, 17, 3. Labels include UB外寸, UB内寸, UBFL, and UBSL.

Top View (Right): Shows the door assembly with dimensions: 711, 1, 35, 23, 65, 50, 15.5, 15, 3, 11, 15, 57, 15, 11. Labels include 内部, UB内寸, 実有効開口 (602), 有効開口 659, 額縁開口 689, and 外部.

Front View (Bottom Right): Shows the door frame with dimensions: 711, 1998, 930. Label includes 着脱レバー.

Notes:

- 外観図 S=1/20
- ・右吊り
- 注) ALタイプハ勝手達イニナリマス。
- 注1、UBSLハUB設置面ヲ示シマス。
- 注2、アジャスト調整範囲±10

Technical drawing of a bathtub with dimensions and labels. The overall width is 685 and the overall height is 1270. The distance between the two main vertical supports is 200. The drawing shows a top-down view of the bathtub with a central drain and a side panel. Labels include '湯' (hot water) and '水' (water) near the top, and 'UB外寸法1670' and 'UB外寸法1270' indicating external dimensions.

Figure 1: Plan view of the UBSL+85. The diagram shows a rectangular layout with dimensions. The total width is 1670, divided into segments of 635.5, 285, 270, and 479.5. The total height is 1270, with a segment of 635. Key features include a large oval on the left, a central square with a trigram symbol, and a large arrow pointing right. Labels include 'UBSL+85' and 'UBSL+89'.

⇒ : 雑排水管VU50 (UB外寸まで)

- ・右吊り

- ・右吊り

注) ALタイプハ勝手違いナリマス。

注1、UBSLハUB設置面ヲ示シマス。

注2、アジャスト調整範囲±10

Technical drawing of the front view of a rectangular box. The overall dimensions are 1670 mm in width and 1270 mm in height. The drawing shows a central vertical crease, a central square feature with a grid pattern, and a large oval-shaped feature on the right side. Dimensions are provided for the overall size and internal sections.

Dimension	Value
Overall Width (UB外寸)	1670
Overall Height (UB外寸)	1270
Top Section Height	265
Middle Section Height	740
Bottom Section Height	265
Left Section Width	110
Inner Section Width (Left)	637.5
Inner Section Width (Right)	637.5
Right Section Width	285

Technical drawing of the rear view of the VVF unit. The drawing shows the following dimensions and components:

- Overall width: 165.5
- Distance from the left edge to the center of the VVF unit: 140
- Distance from the center of the VVF unit to the right edge: (25.5)
- Overall height: $\phi 195$
- Distance from the bottom edge to the center of the VVF unit: $\phi 139$
- Distance from the center of the VVF unit to the right edge: $\phi 32$ 開口
- Component: VVF $\phi 1.6 \times 2C$ 1.5m
- Component: UB内壁

Technical drawing of a door assembly, showing a side elevation and a detail view.

Side Elevation Dimensions:

- Door height: 1897.5
- Door width: 65
- Offset from top: 15
- Offset from bottom: 3
- Offset from side: 17
- Offset from bottom: 30
- Offset from bottom: 35

Labels:

- UB外寸 (UB external dimension)
- UB内寸 (UB internal dimension)
- UBSL (UB side lock)
- UBFL (UB floor lock)

Detail View Dimensions:

- Offset from top: 5
- Offset from top: 35
- Offset from top: 23
- Offset from top: 1
- Offset from side: 3
- Offset from side: 15
- Offset from side: 11
- Offset from side: 57

Technical drawing of a double door unit. The overall width is 711 and the overall height is 1998. The height of the lower section is 930. A label points to the top hinge area, reading "着脱レバー" (Detachable Lever).

・左吊り
注) ARタイプハ勝手違いナリマス。

注2、アジャスト調整範囲±10

[illegible]

Technical drawing of a rectangular structure, likely a container or enclosure, showing dimensions and internal components. The drawing includes the following labels and dimensions:

- Top Dimensions:** 479.5, 270, 285, 635.5
- Left Dimension:** 635
- Right Dimension:** 1270
- Internal Labels:**
 - UBSL+85 (top left)
 - UBSL+85 (bottom left)
 - UBSL+85 (bottom right)
 - UBSL+89 (middle left)
- Internal Features:**
 - A central vertical double-headed arrow.
 - A central square component with a crosshair and a small circle.
 - A large oval shape on the right side.
 - A small circle with a crosshair on the right side.

◀ : 雑排水管VU50 (UB外寸まで)